

SOCE037- 40CM Installation instructions

Please be sure to use a manual screwdriver and refrain from using an electric drill.

Eccentric rod + eccentric wheel	5*40 pointed screws	Small Nails	3.5*14 self-tapping screws	Tall hinge
D14*4	C1*16	K20*10	A2*28	F2*4



Eccentric installation principle:

1 Screw the eccentric screw onto the plate

2 Find the corresponding board and insert it

3 Rotate the board 180° clockwise to lock it

4 Insert the eccentric bolt into the round hole

Board part:

Missing numbers don't mean parts are missing. Just match the numbers to find and install the right parts

Door Panel (10) - Hinge: F2, Screws: A2

Legs (14) x4

Cover plate (1)

Left Panel (2)

Right Panel (4)

Base Plate (5)

Pull Board (7) x2

Shelf (8)

Back Panel (13)

Step 1: Overall installation

<1>

The holes should face inward and be near the bottom

Eccentric wheel D14*4

1 Cover plate

2 Left Panel

4 Right Panel

<2>

Pull Board x 2

5*40 pointed screws C1*8

C1

<3>

Shelf

5*40 pointed screws C1*4

C1

<4>

Make sure the holes are facing forward

Base Plate (5)

5*40 pointed screws C1*4

C1

<5>

Back Panel (13)

small nails K20*10

K20

Door panel adjustment

<6>

3.5*14 self-tapping screws
A2*16

Legs x 4

<7> Overall alignment

3.5*14 self-tapping screws
A2*8


Door Panel

The location for installing the calibration chain is marked with a pinhole on the board. Use the smallest self-tapping screw to fix it.

<8>



Installation completed!

Door gap is too big

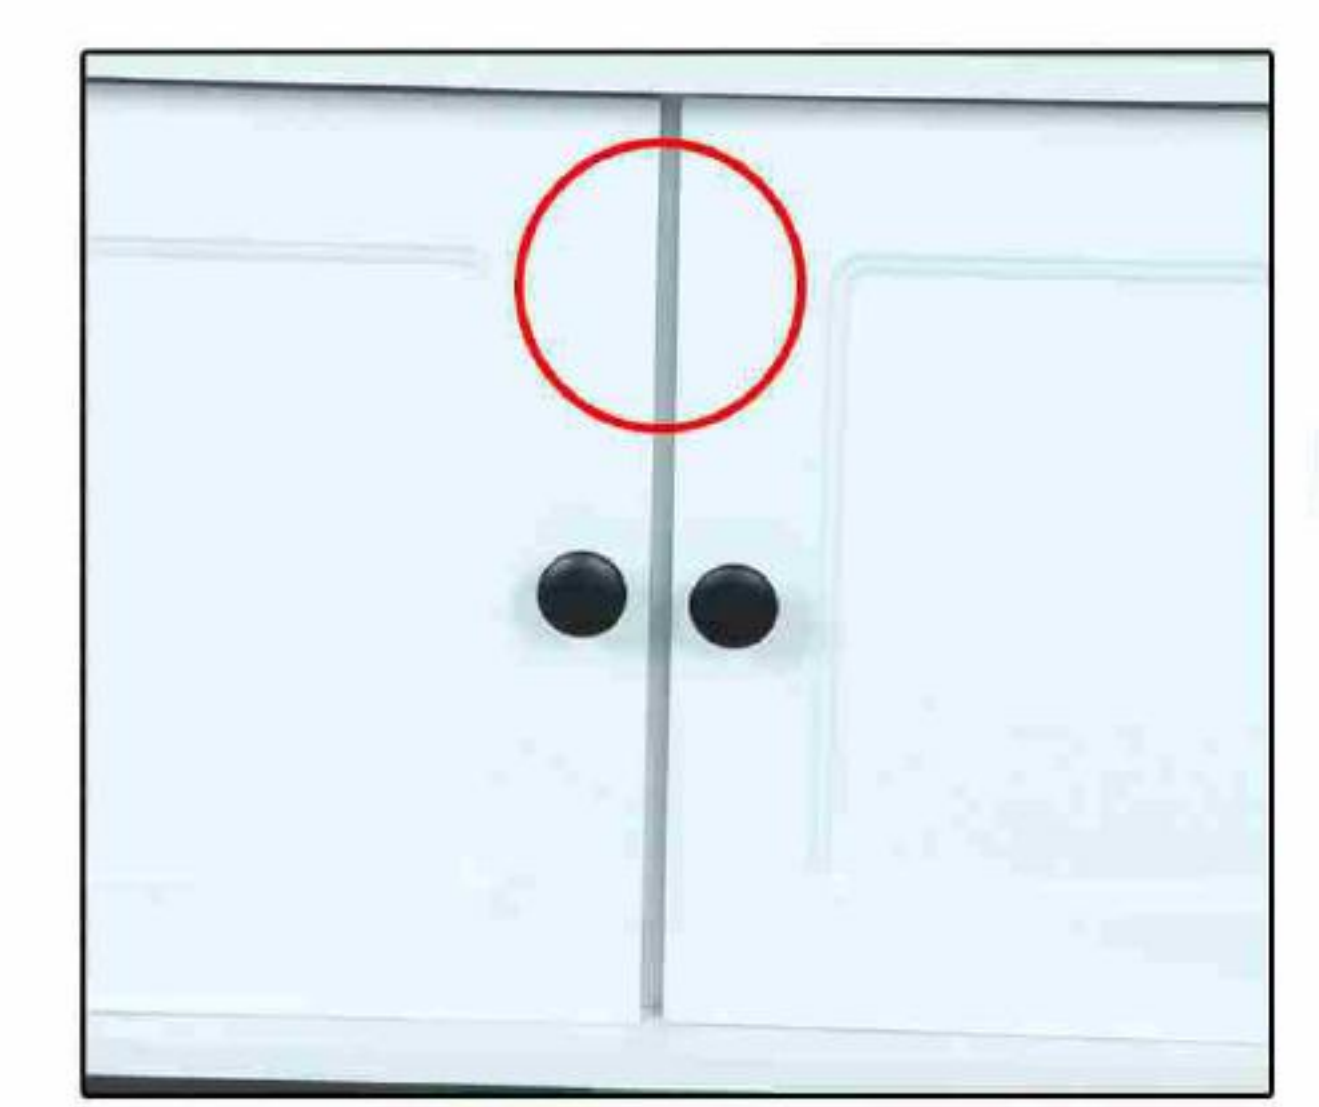




As shown in the picture, the screw that the screwdriver points to is used to adjust the door panel to move left and right, and turning it clockwise is to adjust the door panel to move toward the center.

The gap between the door panel and the side panel is too large

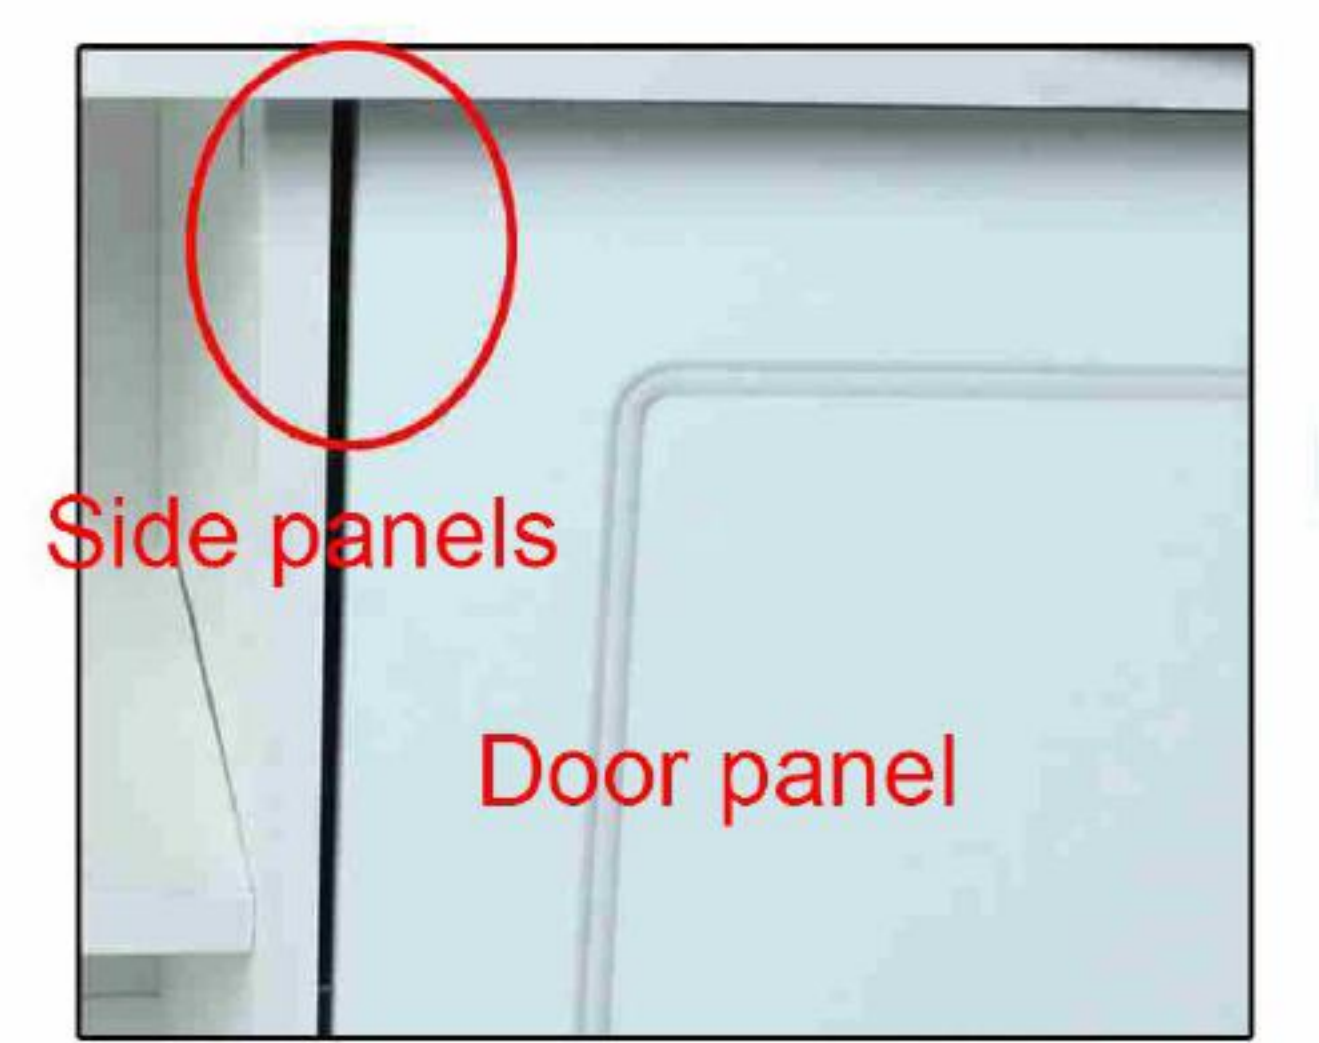

As shown in the figure, loosen the screw that the screwdriver points to, push the door panel in or pull it out, and then tighten it to solve the above problem.

Uneven door panel

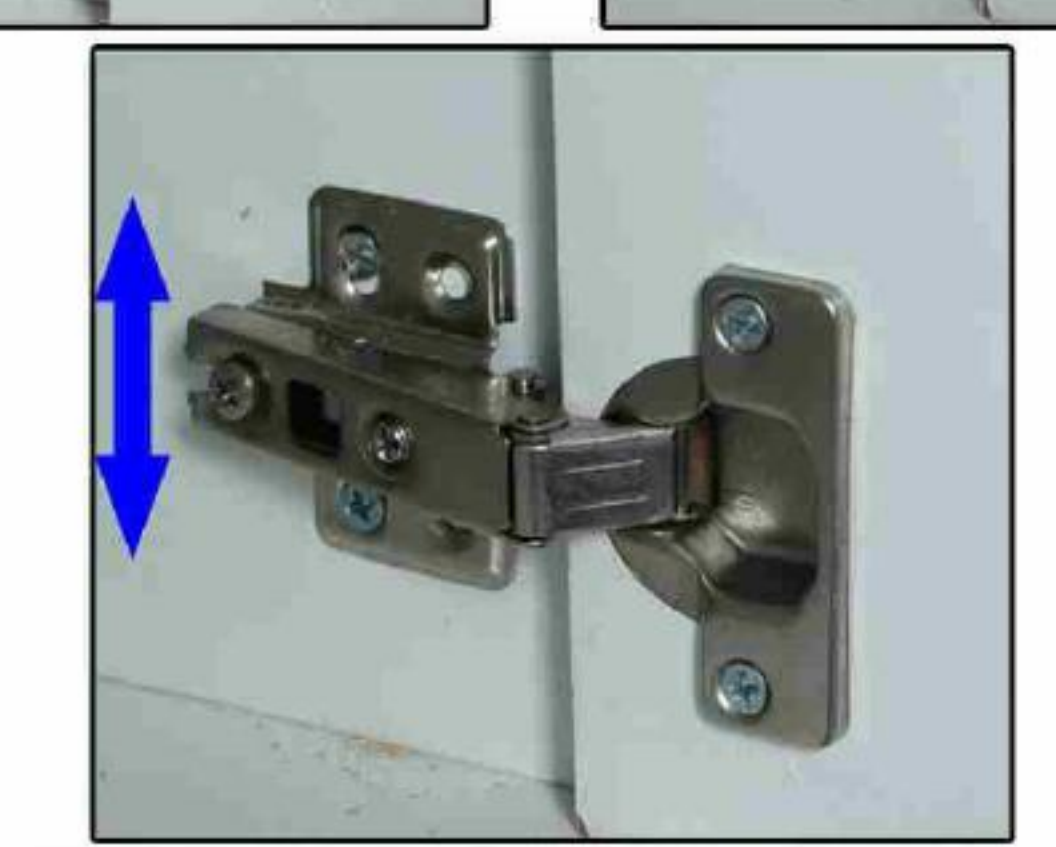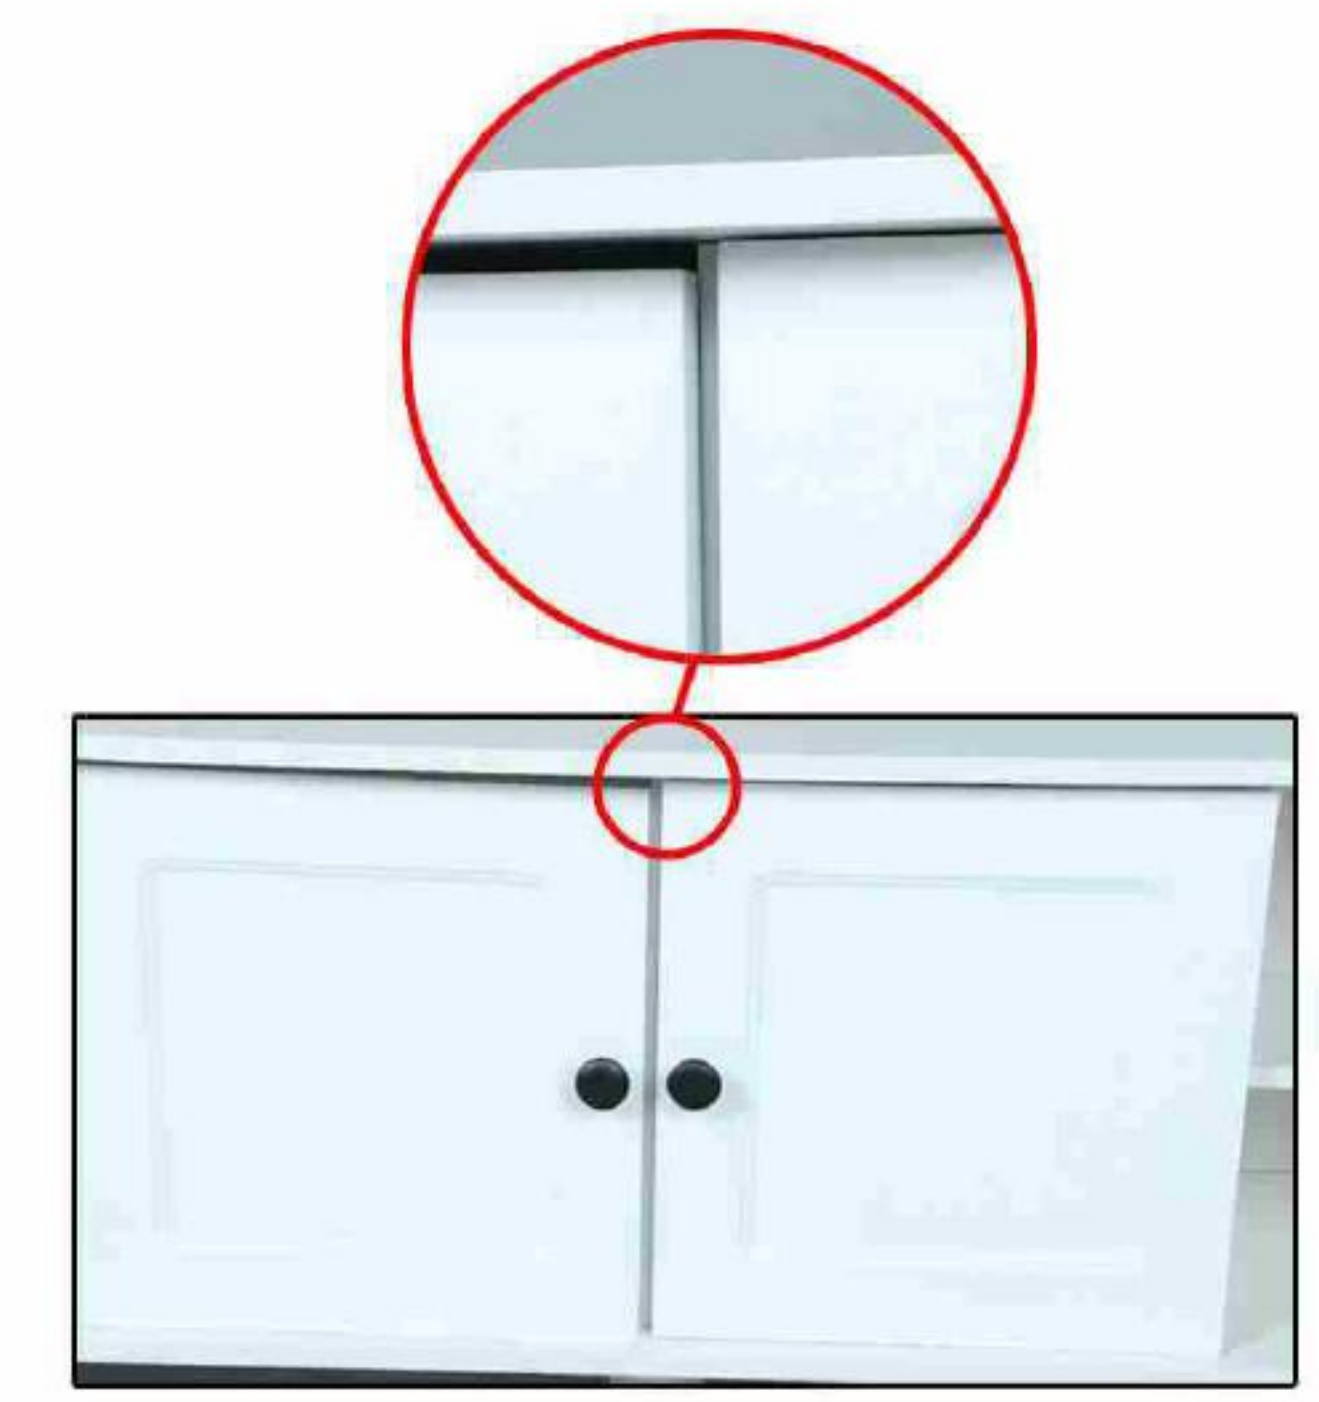

As shown in the figure, loosen the screw that the screwdriver points to, push the lower door panel and hinge upward, and then tighten the screw. Push the upper door panel and hinge downward, and then tighten the screw.